

AIREASE®

Built for life. Yours.

16 SEER Split System Enhanced Heat Pump

4SHP16LT

FORM NO. J4SHP16LT-100 (09/2012)

Features and Benefits

COMPRESSOR

- High-efficiency 2 stage Copeland Ultra Tech™ scroll compressor
- R410a refrigerant
- Grommet mounted compressor for quiet operation
- Internally protected against high temperature motor overload conditions

CABINET

- Full metal louvered panel coil guard protection
- Controls located in corner post for easy installation and service
- Rounded corners for safety and attractive, clean appearance
- Baked polyester paint finish over galvanized steel for maximum durability
- PVC coated wire fan discharge grill
- External gauge ports for easy service
- Raised base pan with ports allows for excellent water and debris drainage

COMPONENTS

- Full metal louvered panels remove for easy coil cleaning and service
- Bi-directional filter drier for long-lasting durability and system protection
- Discharge muffler for quiet operation
- Factory installed crank case heater
- Advanced design defrost system featuring a smart logic for power consumption savings
- Service valves positioned for quick installation and easy service
- Comfort Alert 2 diagnostics factory installed
- Reliable, solid state defrost control
- Defrost control is Quiet Shift™ capable

DESIGN

- Designed for ambients up to 125°F

COIL

- Enhanced aluminum fins and copper tubing for high efficiency and capacity
- Raised coil prevents debris from collecting in bottom of coil and causing loss of airflow



Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your contractor for details or visit www.energystar.gov



FACTORY INSTALLED ACCESSORIES

- Crank case heater
- Compressor sound cover for quiet operation
- High pressure switch
- Low pressure switch for loss of charge protection

WARRANTY

- 10 year limited warranty on compressor, 10 year limited warranty on all parts, extended warranty available*

*Warranty provides for a total of 10 years of limited warranty coverage (Standard 5-year limited parts warranty plus an additional 5-year limited extended parts warranty). Warranty must be registered online within 60 days of installation to qualify for 10-year coverage. Unregistered equipment defaults to 5-year coverage. Lifetime limited heat exchanger warranty applies to registered equipment only (Standard 20 years with no online registration). See full warranty at www.alliedair.com for terms, conditions and exclusions.

Model Number Guide


4	SHP	16	LT	1	24	P	-	2	A
4 - R410a	Heat Pump	16 - 16 SEER Nominal	Louvered Two Stage	Series	24 - 24,000 Btuh	P - 208-230v/60hz/1Ph		2	Minor Revision Code
									Major Revision Code
									Voltage
									Nominal Capacity

Physical and Electrical

Model	Voltage/Hz/Phase	Voltage Range	Min. Circuit Amp.	Max. Over current Device (amps)	Compressor		Fan Motor			Refrig. Charge (oz.)	Weight (lbs.)
					Rated Load (amps)	Locked Rotor (amps)	Rated Load (amps)	Rated HP	Nom. RPM		
4SHP16LT124P-2	208-230-60/1	197-253	13.5	20	11.4	52	0.7	1/10	1075	146	207
4SHP16LT136P-2	208-230-60/1	197-253	22.5	35	19.0	82	1.7	1/4	825	192	253
4SHP16LT148P-2	208-230-60/1	197-253	28.2	45	24.0	96	1.8	1/3	825	236	288
4SHP16LT160P-2	208-230-60/1	197-253	35.1	60	26.0	118	2.8	1/3	ECM	244	313

Unit Dimensions (in.) and Sound Ratings

Model No.	Dimensions			Sound Rating dBA
	A	B	C	
4SHP16LT124P-2	24-3/4	26-3/4	33-3/4	73
4SHP16LT136P-2	29-3/8	31-1/4	37-3/4	75
4SHP16LT148P-2	35-3/4	37-3/4	37-3/4	75
4SHP16LT160P-2	35-3/4	37-3/4	43-3/4	74

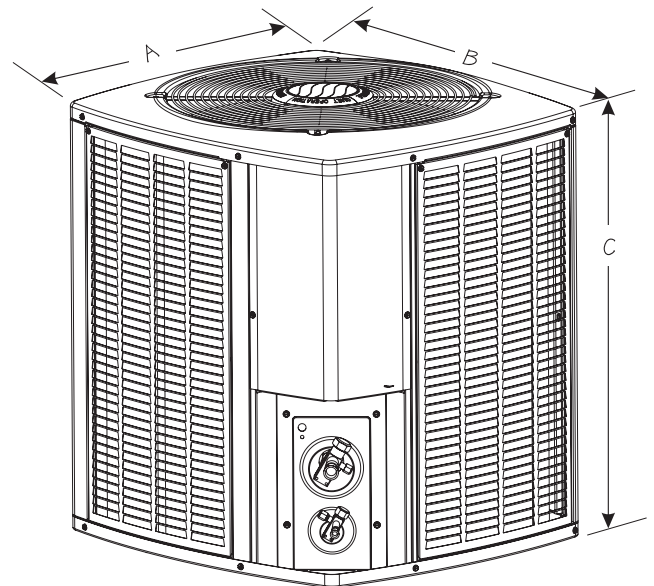

Cooling Performance with Air Handlers and Furnaces 24

Outdoor Model	Indoor Model		Cooling				Heating				CFM	Refrigerant Connection				Refrig. Line Size		Indoor Expansion Device		
	Evaporator Coil or Air Handler ²	Furnaces	SEER	EER	ARI Rated Capacity ¹	Rated Sensible Capacity	HSPF	47		17		Outdoor		Indoor		Suction	Liquid	Piston ²	TXV	
								Btuh	COP	Btuh		COP	Suction	Liquid	Suction					Liquid
4SHPT16IT124P-2	BCS2M24V00NA1P		15.0	12.5	24,000	17,400	8.5	24,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	EFV08BC	15.0	12.5	24,000	17,400	8.5	24,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,M,H)1P29B	EFV08BC	15.0	12.5	24,000	17,400	8.5	24,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P29A	A80DF1E045A12	14.5	12.0	24,000	17,400	8.5	22,600	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36A	A80DF1E045A12	14.5	12.0	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P29B	A80DF1E070B12	14.0	12.0	24,000	17,400	8.5	22,600	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A80DF1E070B12	14.0	12.0	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P29A	A80DF2V070A12	14.5	12.5	24,000	17,400	8.5	22,600	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36A	A80DF2V070A12	14.5	12.5	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P29B	A80DF2V090B16	14.5	12.5	24,000	17,400	8.5	22,600	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A80DF2V090B16	14.5	12.5	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,M,H)1P29B	A80DF2V090B16	14.2	12.5	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P29A	A80UH1E045A12*	14.5	12.0	24,000	17,400	8.5	22,600	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36A	A80UH1E045A12*	14.5	12.5	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P29B	A80UH1E070B12*	14.0	12.0	24,000	17,400	8.5	22,600	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A80UH1E070B12*	14.0	12.0	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A80UH2V090B12	14.5	12.5	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,M,H)1P29B	A80UH2V090B12	14.5	12.5	24,000	17,400	8.5	22,600	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A80UH2V090B16	14.5	12.5	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,M,H)1P29B	A80UH2V090B16	14.5	12.5	24,000	17,400	8.5	22,600	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P29B	A95DF2V045B12S	14.5	12.5	24,000	17,400	8.5	22,600	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A95DF2V045B12S	14.5	12.5	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P29B	A95UH1E070B12S	14.0	12.0	24,000	17,400	8.5	22,600	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A95UH1E070B12S	14.0	12.0	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P29B	A95UH2V045B12S	14.5	12.5	24,000	17,400	8.5	22,600	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A95UH2V045B12S	15.0	12.5	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P29B	A95UH2V070B12S	15.0	12.5	24,000	17,400	8.5	22,600	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A95UH2V070B12S	15.0	12.5	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
E(U,C,M,H)1P36C	A95UH2V090C12S	15.0	12.5	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01	
E(U,C,M,H)1P36B	A96DFMV070B12	14.5	12.5	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01	

Note:

¹Certified in accordance with Unitary Air Conditioner Certification Program, which is based on AHRI Standard 210/240.

²Required to achieve AHRI rating. If NA (Not Applicable) is in the piston column, then TXV is required

³A blower time delay is required to achieve AHRI rating. This feature is standard on all Allied Air Enterprises furnace and air handler products.

Cooling Performance with Air Handlers and Furnaces 24, 36

Outdoor Model	Indoor Model		Cooling				Heating				CFM	Refrigerant Connection				Refrig. Line Size		Indoor Expansion Device		
												Outdoor		Indoor		Suction	Liquid	Piston ²	TXV	
	Evaporator Coil or Air Handler ²	Furnaces	SEER	EER	ARI Rated Capacity ¹	Rated Sensible Capacity	HSPF	47		17		Suction	Liquid	Suction	Liquid					
								Btuh	COP	Btuh						COP				
4SHHP16LT124P-2	E(U,M,H)1P29B	A96DFMV070B12	14.5	12.5	24,000	17,400	8.5	22,600	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A96UHMV070B12	14.5	12.5	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,M,H)1P29B	A96UHMV070B12	14.5	12.5	24,000	17,400	8.5	22,600	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A96UHMV090C12	14.5	12.5	24,000	17,400	8.5	22,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	LBR,LUF*****V14	15.0	12.5	24,000	17,400	8.5	24,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,M,H)1P29B	LBR,LUF*****V14	15.0	12.5	24,000	17,400	8.5	24,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	LHF,LHR,LUF*****V12	15.0	12.5	24,000	17,400	8.5	24,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01
E(U,M,H)1P29B	LHF,LHR,LUF*****V12	15.0	12.5	24,000	17,400	8.5	24,000	3.3	14,000	2.40	850	3/4	3/8	3/4	3/8	3/4	3/8	NA	H4TXV01	
4SHHP16LT136P-2	BCS2M36V00NA1P		15.0	12.5	35,000	25,400	8.5	36,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	EFV12BC	15.0	12.5	35,000	25,400	8.5	36,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43B	EFV12BC	15.0	12.5	35,000	25,400	8.5	36,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A80DF1E090B16	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43B	A80DF1E090B16	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A80DF2V090B16	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A80DF2V110C20	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A80DF2V110C20	15.5	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A80UH1E090B16*	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43B	A80UH1E090B16*	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A80UH2V090B16	15.0	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A80UH2V090C20	15.0	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A80UH2V090C20	15.5	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A95DF1E070B16S	14.5	12.0	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43B	A95DF1E070B16S	14.5	12.0	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A95DF1E090C16S	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A95DF1E090C16S	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A95DF2V045B12S	15.0	12.0	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43B	A95DF2V045B12S	15.0	12.0	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A95DF2V070B16S	15.0	12.0	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43B	A95DF2V070B16S	15.0	12.0	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A95DF2V090C20S	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A95DF2V090C20S	15.5	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A95DF2V110C20S	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A95DF2V110C20S	15.5	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A95UH1E090C16S	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A95UH1E090C16S	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01

Note:

¹Certified in accordance with Unitary Air Conditioner Certification Program, which is based on AHRI Standard 210/240.

²Required to achieve AHRI rating. If NA (Not Applicable) is in the piston column, then TXV is required

³A blower time delay is required to achieve AHRI rating. This feature is standard on all Allied Air Enterprises furnace and air handler products.

Cooling Performance with Air Handlers and Furnaces 36, 48

Outdoor Model	Indoor Model		Cooling				Heating				CFM	Refrigerant Connection				Refrig. Line Size		Indoor Expansion Device		
			Evaporator Coil or Air Handler ²	Furnaces	SEER	EER	ARI Rated Capacity ¹	Rated Sensible Capacity	HSPF	47		17		Outdoor		Indoor		Suction	Liquid	Piston ²
	Btuh	COP								Btuh		COP	Suction	Liquid	Suction	Liquid				
4SHP16LT136P-2	E(U,C,M,H)1P36B	A95UH2V045B12S	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43B	A95UH2V045B12S	15.0	12.0	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	A95UH2V070B12S	15.0	12.0	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43B	A95UH2V070B12S	15.0	12.0	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A95UH2V090C12S	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A95UH2V090C12S	15.5	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A95UH2V090C16S	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A95UH2V090C16S	15.5	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A95UH2V090C20S	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A95UH2V090C20S	15.5	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A95UH2V110C16S	15.0	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A95UH2V110C16S	15.5	12.5	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A96DFMV090C16	15.0	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A96DFMV090C16	15.5	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A96DFMV090C20	15.0	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A96DFMV090C20	15.5	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A96DFMV110C20	15.0	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A96DFMV110C20	15.5	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A96UHMV090C12	15.0	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A96UHMV090C12	15.5	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A96UHMV090C16	15.0	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A96UHMV090C16	15.5	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36C	A96UHMV110C20	15.0	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43C	A96UHMV110C20	15.5	11.6	35,000	25,400	8.5	35,000	3.3	22,000	2.40	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	LBR,LUF*****V14	14.5	12.0	35,000	25,400	8.0	36,000	3.0	22,000	2.00	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43B	LBR,LUF*****V14	14.5	12.0	35,000	25,400	8.0	36,000	3.0	22,000	2.00	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P36B	LHF,LHR,LUF*****V12	14.5	12.0	35,000	25,400	8.0	36,000	3.0	22,000	2.00	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01
	E(U,C,M,H)1P43B	LHF,LHR,LUF*****V12	14.5	12.0	35,000	25,400	8.0	36,000	3.0	22,000	2.00	1,310	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV01
E(U,C,M,H)1P36C	LUF*****V20	15.0	12.5	35,000	25,400	8.5	36,000	3.3	22,000	2.40	1,310	7/8	3/8	3/4	3/8	7/8	3/8	NA	H4TXV01	
4SHP16LT148P-2	BCS2M48V00NA1P		16.0	12.5	47,000	33,500	8.5	46,000	3.2	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	EFV16CC	14.5	11.5	46,500	33,100	8.0	46,000	3.0	29,000	2.00	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	EFV16CC	14.5	12.0	46,500	33,100	8.0	46,000	3.0	29,000	2.00	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A80DF1E110C20	14.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A80DF1E110C20	14.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
E(U,C,H)1P49C	A80DF2V110C20	15.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02	

Note:

¹Certified in accordance with Unitary Air Conditioner Certification Program, which is based on AHRI Standard 210/240.

²Required to achieve AHRI rating. If NA (Not Applicable) is in the piston column, then TXV is required

³A blower time delay is required to achieve AHRI rating. This feature is standard on all Allied Air Enterprises furnace and air handler products.

Cooling Performance with Air Handlers and Furnaces 48

Outdoor Model	Indoor Model		Cooling				Heating				CFM	Refrigerant Connection				Refrig. Line Size		Indoor Expansion Device		
												Outdoor		Indoor		Suction	Liquid	Piston ²	TXV	
	Evaporator Coil or Air Handler ²	Furnaces	SEER	EER	ARI Rated Capacity ¹	Rated Sensible Capacity	HSPF	47		17		Suction	Liquid	Suction	Liquid					
								Btuh	COP	Btuh						COP				
4SHP16LT148P-2	E(U,C,H)1P62C	A80DF2V110C20	15.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A80DF2V110C20	15.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A80UH1E090C20*	14.5	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A80UH1E090C20*	14.5	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A80UH1E110C20*	14.5	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A80UH1E110C20*	14.5	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A80UH2V090C20	15.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A80UH2V090C20	15.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A80UH2V110C20	15.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A80UH2V110C20	15.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A95DF1E110C20S	14.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A95DF1E110C20S	14.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A95DF2V090C20S	14.5	11.5	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A95DF2V090C20S	15.0	11.5	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A95DF2V110C20S	15.0	11.5	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A95DF2V110C20S	15.0	11.5	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A95UH1E110C20S	14.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A95UH1E110C20S	14.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A95UH2V090C16S	14.5	11.5	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A95UH2V090C16S	15.0	11.5	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A95UH2V090C20S	15.0	11.5	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A95UH2V090C20S	15.0	11.5	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A95UH2V110C16S	15.0	11.5	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A95UH2V110C16S	15.0	11.5	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A95UH2V110C20S	15.0	11.5	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A95UH2V110C20S	15.0	11.5	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A96DFMV090C16	15.0	11.7	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A96DFMV090C16	15.0	11.7	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A96DFMV090C20	15.0	11.7	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A96DFMV090C20	15.0	11.7	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A96DFMV110C20	15.0	11.7	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A96DFMV110C20	15.0	11.7	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
E(U,C,H)1P49C	A96UHMV090C16	15.0	11.7	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02	
E(U,C,H)1P62C	A96UHMV090C16	15.0	11.7	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02	
E(U,C,H)1P49C	A96UHMV090C20	15.0	11.7	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02	

Note:

¹Certified in accordance with Unitary Air Conditioner Certification Program, which is based on AHRI Standard 210/240.

²Required to achieve AHRI rating. If NA (Not Applicable) is in the piston column, then TXV is required

³A blower time delay is required to achieve AHRI rating. This feature is standard on all Allied Air Enterprises furnace and air handler products.

Cooling Performance with Air Handlers and Furnaces 48, 60

Outdoor Model	Indoor Model		Cooling				Heating				CFM	Refrigerant Connection				Refrig. Line Size		Indoor Expansion Device		
												Outdoor		Indoor		Suction	Liquid	Piston ²	TXV	
	Evaporator Coil or Air Handler ²	Furnaces	SEER	EER	ARI Rated Capacity ¹	Rated Sensible Capacity	HSPF	47		17		Suction	Liquid	Suction	Liquid					
								Btuh	COP	Btuh						COP				
4SHP16LT148P-2	E(U,C,H)1P62C	A96UHMV090C20	15.0	11.7	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	A96UHMV110C20	15.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	A96UHMV110C20	15.0	12.0	47,000	33,500	8.5	46,500	3.3	29,000	2.40	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	LBR,LUF*****V14	14.5	12.0	46,500	33,100	8.0	46,000	3.0	29,000	2.00	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	LBR,LUF*****V14	14.5	12.0	46,500	33,100	8.0	46,000	3.0	29,000	2.00	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P49C	LUF*****V20	14.5	12.0	46,500	33,100	8.0	46,000	3.0	29,000	2.00	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
	E(U,C,H)1P62C	LUF*****V20	14.5	12.0	46,500	33,100	8.0	46,000	3.0	29,000	2.00	1,600	7/8	3/8	7/8	3/8	7/8	3/8	NA	H4TXV02
4SHP16LT160P-2	BCS2M60V00NA1P		15.0	12.5	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62D	EFV20DC	14.5	11.5	59,000	43,000	8.0	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A80DF2V110C20	15.0	11.4	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A80UH1E090C20*	14.5	11.0	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A80UH1E110C20*	14.5	11.0	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A80UH2V090C20	14.7	11.4	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A80UH2V110C20	14.5	11.4	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62D	A80UH2V135D20	14.7	11.4	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A95DF1E110C20S	14.0	11.0	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A95DF2V090C20S	14.5	11.4	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A95DF2V110C20S	15.0	11.4	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A95UH1E110C20S	14.0	11.0	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62D	A95UH1E135D20	14.0	11.0	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A95UH2V090C20S	15.0	11.4	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A95UH2V110C20S	15.0	11.4	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62D	A95UH2V135D20S	15.0	11.4	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A96DFMV090C20	15.0	11.4	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A96DFMV110C20	15.0	11.4	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A96UHMV090C20	15.0	11.4	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62C	A96UHMV110C20	15.0	11.4	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
	E(U,C,H)1P62D	A96UHMV135D20	15.0	11.4	59,000	43,000	8.5	59,000	3.3	35,000	2.40	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03
E(U,C,H)1P62C	LUF*****V20	14.5	12.0	59,000	43,000	8.0	59,000	3.0	35,000	2.00	1,920	7/8	3/8	7/8	3/8	1 1/8	3/8	NA	H4TXV03	

Note:

¹Certified in accordance with Unitary Air Conditioner Certification Program, which is based on AHRI Standard 210/240.

²Required to achieve AHRI rating. If NA (Not Applicable) is in the piston column, then TXV is required

³A blower time delay is required to achieve AHRI rating. This feature is standard on all Allied Air Enterprises furnace and air handler products.

Cooling Performance Extended Ratings

Outdoor Model	Indoor Model	Indoor Temp DB/WB °F	Outdoor Temp - DB°F														
	Piston or Field Installed TXV		65°			82°			95°			105°			115°		
			Btuh	S/T	kW	Btuh	S/T	kW	Btuh	S/T	kW	Btuh	S/T	kW	Btuh	S/T	kW
4SHP16LT 124P-2	BCS2M24V+TXV	85/75	32,300	0.59	1.54	29,523	0.61	1.80	27,400	0.63	1.99	24,800	0.69	2.25	22,200	0.74	2.51
		80/67	29,400	0.65	1.51	26,793	0.70	1.78	24,800	0.73	1.99	22,950	0.74	2.20	21,100	0.75	2.41
		75/63	26,700	0.69	1.48	24,490	0.71	1.74	22,800	0.73	1.93	21,550	0.76	2.16	20,300	0.78	2.38
		75/57	23,100	0.73	1.45	21,400	0.74	1.71	20,100	0.74	1.90	19,250	0.77	2.00	18,400	0.79	2.10
4SHP16LT 136P-2	BCS2M36V+TXV	85/75	45,000	0.60	2.40	42,223	0.66	2.73	40,100	0.71	2.99	31,750	0.80	3.30	23,400	0.89	3.60
		80/67	42,100	0.61	2.38	39,550	0.68	2.70	37,600	0.73	2.94	30,050	0.82	2.77	22,500	0.91	2.60
		75/63	39,300	0.63	2.35	37,033	0.69	2.20	35,300	0.73	2.08	28,550	0.82	2.33	21,800	0.91	2.58
		75/57	37,200	0.66	2.31	35,613	0.72	2.12	34,400	0.76	1.98	27,250	0.83	2.04	20,100	0.90	2.10
4SHP16LT 148P-2	BCS2M48V+TXV	85/75	52,300	0.62	2.96	51,053	0.64	3.49	50,100	0.66	3.89	47,600	0.74	4.27	45,100	0.82	4.65
		80/67	50,600	0.68	2.12	49,127	0.70	3.11	48,000	0.72	3.87	45,300	0.77	4.26	42,600	0.81	4.65
		75/63	48,300	0.72	2.87	44,730	0.74	3.35	42,000	0.75	3.72	39,500	0.77	4.18	37,000	0.79	4.64
		75/57	46,400	0.73	2.86	43,510	0.75	3.34	41,300	0.76	3.71	38,500	0.77	4.11	35,700	0.78	4.51
4SHP16LT 160P-2	BCS2M60V+TXV	85/75	74,900	0.62	3.72	69,290	0.65	4.49	65,000	0.68	5.07	61,400	0.68	5.71	57,800	0.68	6.34
		80/67	69,700	0.69	3.65	64,770	0.71	4.46	61,000	0.73	5.08	55,800	0.77	5.70	50,600	0.81	6.32
		75/63	65,100	0.73	3.63	60,170	0.75	4.37	56,400	0.76	4.93	52,050	0.80	5.57	47,700	0.83	6.20
		75/57	61,400	0.75	3.58	57,207	0.76	4.28	54,000	0.77	4.81	49,550	0.81	5.48	45,100	0.85	6.14

Heating Performance Extended Ratings

Outdoor Model	Indoor Model	Indoor Temp	Outdoor Temp - DB/WB °F									
			0/0		17/15		35/33		47/43		62/56	
	Piston or Field Installed TXV		Btuh	kW	Btuh	kW	Btuh	kW	Btuh	kW	Btuh	kW
4SHP16LT124P-2	BCS2M24V+TXV	70	12,361	1.64	15,100	1.83	18,000	2.03	24,500	2.17	29,200	2.34
4SHP16LT136P-2	BCS2M36V+TXV	70	15,811	2.04	22,800	2.49	30,200	2.97	40,600	3.55	49,500	4.08
4SHP16LT148P-2	BCS2M48V+TXV	70	28,561	3.32	31,300	3.49	34,200	3.67	46,900	3.59	54,700	3.64
4SHP16LT160P-2	BCS2M60V+TXV	70	36,783	4.04	39,900	4.17	43,200	4.31	60,300	4.73	70,500	5.01

Accessories

Description	Where Used	Kit Catalog No.
Hard Start Kit	24 & 36	10J42
	48 & 60	81J69
Compressor Low Ambient Kit	All Models	45F08
Freezestat	All Models	93G35
Outdoor Thermostat	All Models	ASTA503
Fossil Fuel Kit	All Models	AFOSL500
Low Pressure Switch	Factory installed; see spare parts list	
High Pressure Switch	Factory installed; see spare parts list	
Sound Blanket	Factory installed; see spare parts list	
Crankcase Heater	Factory installed; see spare parts list	
Relay Kit- Constant Torque	All Constant Torque Furnaces	85W66



Built for life. Yours.

www.airease.com

1-800-448-5872

All specifications and illustrations
subject to change without notice
and without incurring obligations.